

# 10.4" RACK MOUNT LCD MONITOR



- 10.4" TFT LCD display (1024 x 768 resolution) in 5U (8.75") of rack space.
- Housed in rugged steel construction with a black powder coat finish.
- Supplied with VGA cables, AC/DC adapter and power cord.
- ARGB (Analog RGB) and DVI-D signal inputs.
- Optional S-Video and Composite Video inputs.
- Optional Lexan™ screen protection available (L).
- Energy efficient LED backlight.
- Wide viewing angles.

## GENERAL SPECIFICATIONS

### Dimensions:

19.0" (W) x 8.75" (H) x 2.40" (D).

### Weight:

10 lbs

### Power:

110 - 240 VAC, 50/60 Hz.  
40 Watts max.

### On-Screen Controls:

Brightness, Contrast, Horizontal & Vertical Position, Auto Adjust, OSD H & V Position, Input Select, Color Temp., Reset.

### Plug & Play:

DDC1 and DDC2B

### Temperature:

Operating: 0°C to 50°C  
Storage: -20°C to 60°C

### Humidity:

Operating: 10 to 90% RH (max)

### Input Signal (VGA):

R.G.B. analog video, TTL H & V sync.

### Input Signal (Digital):

DVI-D (TDMS).

### Input Connectors:

Analog: 15 pin mini D-Sub.  
Digital: 24 pin DVI-D.

### Colors Available:

Black.

## DISPLAY SPECIFICATIONS

### Display Type:

Active matrix TFT LCD

### Display area:

10.4" Diagonal.

### Colors Displayed:

16.2M colors.

### Contrast Ratio:

1200:1 typ.

### Brightness:

500 cd/m<sup>2</sup> typ.

### Viewing Angle:

Horizontal: 176°  
Vertical: 176°

### Response Time:

25ms Typ.

### Resolution:

VGA up to 1024 x 768.

### Horizontal Frequency:

31.5 to 80KHz.

### Vertical Frequency:

56 to 75 Hz.

### Backlight Type:

LED


### Screen Protection:

Lexan™ optional.

Specifications subject to change without notice.

## MODEL NUMBER

### RMM-101(X)(X)

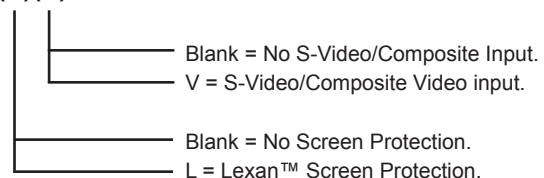

Offering OEM and custom solutions.  
Contact us for additional information.

**RECORTEC, INC.**

www.recortec.com

sales@recortec.com

**1-800-729-7654**

3329 Kifer Road Santa Clara, CA 95051  
Tel: 408-928-1480 Fax: 408-928-1489