


19" 16:10 FORMAT MONITOR

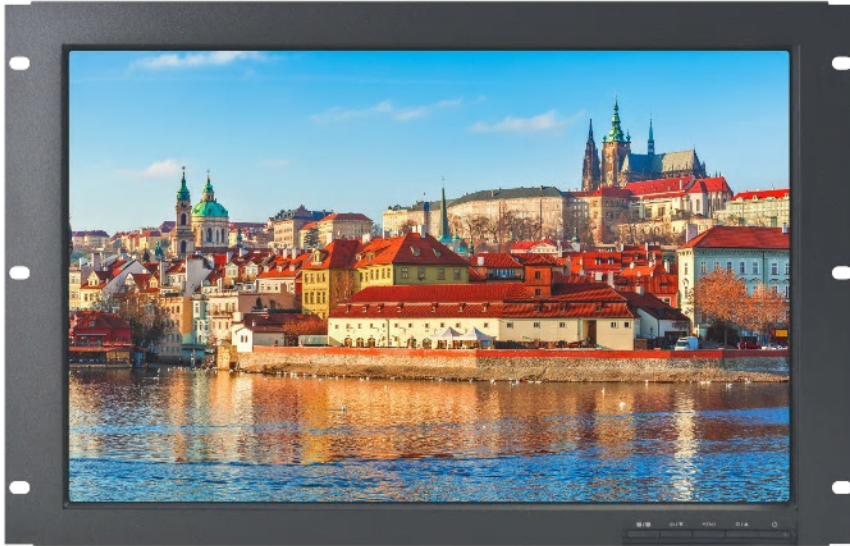

- Commercial grade monitor in a steel frame
- Mounts flush in 7U of 19" rack space
- 19" TFT LCD display with 1440 x 900 resolution
- Wide format 16:10 aspect ratio
- Analog (ARGB) and Digital (DVI-D) input connectors
- Energy saving LED backlight
- Fast 5 ms response time

GENERAL SPECIFICATIONS

- Dimensions:**
19.0" (W) x 12.25" (H) x 2.9" (D)
- Weight:**
10.7 lbs.
- Power:**
100 - 240 VAC, 50/60 Hz.
27 Watts.
- On-Screen Controls:**
Brightness, Contrast, Horizontal & Vertical
Position, Auto Adjust, OSD H & V Position, Input Select
Color Temp., Reset.
- Plug & Play:**
DDC2B
- Temperature:**
Operating: 10°C to 40°C
Storage: -20°C to 45°C
- Humidity:**
Operating: 10 to 80% RH (max)
- Input Signal (VGA):**
R.G.B. analog video, TTL H & V sync.
- Input Signal (Digital):**
DVI with HDCP.
- Input Connectors:**
Analog: 15-pin mini D-Sub.
Digital: 24 pin DVI-D.
- Colors Available:**
Black.

DISPLAY SPECIFICATIONS

- Display Type:**
Active matrix TFT LCD
- Display area:**
19" Wide.
- Colors Displayed:**
16.7 million colors.
- Contrast Ratio:**
1,000:1 (10M:1 Dynamic)
- Brightness:**
250 cd/m² typ.
- Viewing Angle:**
Horizontal: 170°
Vertical: 160°
- Response Time:**
5 ms.
- Resolution:**
Up to 1440 x 900.
- Aspect Ratio:**
16:10.
- Backlight type:**
LED

Specifications subject to change without notice.

MODEL NUMBER

RMM-419N3
RMM-419N3L with Lexan™ Screen Protection

*Contact us about other options and
our additional rack mount products.*



RECORTEC, INC.

www.recortec.com
sales@recortec.com

2231-A Fortune Drive
San Jose, CA 95131

Tel: 408-928-1480
Fax: 408-928-1489